

Millennium G400 • Millennium G400 MAX

User Guide

10526-301-0520 2000.02.18

Hardware installation

WARNING: To avoid personal injury, turn off your computer, unplug it, and then wait for it to cool before you touch any of its internal parts. Also, static electricity can severely damage electronic parts. Before touching any electronic parts, drain static electricity from your body (for example, by touching the metal frame of your computer). When handling a card, carefully hold it by its edges and avoid touching its circuitry.

1 Switch to the standard VGA display driver

If you're running Windows 95/98/2000 on your computer, this step isn't necessary.


If you're using another operating system (for example, Windows NT 4.0), see its documentation for how to switch to VGA mode.

2 Open your computer and remove your existing graphics card*

Turn off your computer and all peripherals such as your monitor or printer. Open the computer and remove your existing graphics card. (If you have a display adapter built into your computer's motherboard, it should automatically disable itself after your Matrox card is installed.)

3 Locate the AGP slot in your computer


Most computers have different types of expansion slots. Your Matrox graphics card is an AGP card. Locate the AGP slot in your computer. Your system manual should identify the location of each type of expansion slot in your computer.



^{*} With multi-display mode, you may be able to use your existing graphics card. For Windows 98/2000, see Windows 98/2000 online help under "Multiple Display Support". For Windows NT 4.0, only Matrox graphics card models supported by the Matrox display driver can be used.


WARNING: Inserting your Matrox card into the wrong type of slot could damage your card, your computer, or both.

Don't insert the plastic tab of your AGP card (see picture) into the slot.




4 Insert your Matrox card

Remove the cover for the slot you intend to use. Save the screw for the mounting bracket. Position your Matrox card over the expansion slot you've chosen. Push the card in firmly and evenly until it's fully seated in the slot. Replace the screw to secure the bracket of your Matrox card to the computer frame.



5 Connect the monitor

Simply plug your monitor cable into the monitor connector on your Matrox card (connector **1**, if you have a card with more than one connector). Make sure the other end of the monitor cable is properly connected to your monitor. See your monitor manual for more information.




6 If your Matrox card has a second monitor connector:

Connect the second monitor

Simply plug your second monitor cable into monitor connector **2** on your Matrox card. Make sure the other end of the monitor cable is properly connected to your monitor. See your monitor manual for more information.

Note: Instead of a computer monitor, you can connect a TV or VCR to the second monitor connector. You can do this using the special adapter included with your Matrox card. For more information, see "TV output" in the online version of this guide.



Your Matrox card is now installed. To get the most out of your Matrox card, install Matrox software:


- 9x NT 2k
- for Windows 95/98/2000 and NT 4.0, see "Software installation", page 5.
 - for Windows 3.1, Windows NT 3.51, and OS/2 Warp 3.0/4.0, see the *Readme* file in the root folder of the Matrox installation CD-ROM.

Software installation

9x NT 2k

This section describes how to install Matrox software for *Windows 95/98/2000 or NT 4.0*.

(For other operating systems, see the *Readme* file in the root folder of the Matrox installation CD-ROM.)



1 Restart your computer

If you're using Windows 95/98/2000, it detects new hardware when you restart. If Matrox display drivers haven't been previously installed, Windows reports finding a PCI adapter (even if you have an AGP card). Windows prompts you to install a display driver. Follow the on-screen instructions. (The Matrox Windows 95/98 display driver is in the *Win9x* folder of your Matrox installation CD-ROM. The Matrox Windows 2000 display driver is in the *Win2k* folder.)

2 Install required software

After your computer has restarted, insert (or reinsert) the Matrox installation CD-ROM in your CD-ROM drive – the setup program automatically starts.* This setup program works with Windows 95/98/2000 and NT 4.0, and detects which operating system you're using. If the required display software isn't already installed, the setup program automatically prompts you to install this software. Follow the on-screen instructions.

After the required display software is installed, you're prompted to restart your computer for changes to take effect. Leave your Matrox CD-ROM in your CD-ROM drive.

3 Install optional software

After your computer restarts, the setup program shows you a list of additional items you can install. For each item you want to install, select a list item, click **Install**, then follow the on-screen instructions.

4 Set up your display software

See "Software setup", page 6.

5

^{*} If Windows doesn't automatically start the setup program, you can start it manually from the root folder of the CD-ROM.

Software setup

Your Matrox display driver includes Matrox PowerDesk software. This software helps you get the most out of your Matrox graphics card. This section has important information on how to configure your display settings using Matrox PowerDesk software.

Accessing PowerDesk property sheets

Many display controls are on Matrox PowerDesk property sheets. You can identify Matrox PowerDesk property sheets by the icon appearing on the tab. To access these property sheets:



- Windows 95 Right-click your Windows desktop background, then click Properties.
- 98 2k
- Windows 98/2000 Right-click your Windows desktop background, then click Properties → Settings → Advanced. If you're using a multi-display desktop, select a display before clicking Advanced.
- **WNT**
- Windows NT 4.0 Click Start → Programs → Matrox PowerDesk NT → Matrox Display Properties.

Also, to quickly access PowerDesk features, click the QuickDesk icon (**[**]) on your Windows taskbar.

Note: Multi-display mode is supported under Windows 98/2000 and NT 4.0. For more information on multi-display mode, see Windows 98/2000 online help under "Multiple Display support" and see "DualHead Multi-Display setup", page 8. (Windows 95 doesn't support multiple displays.)

Monitor setup

Before changing your display resolution, color palette, or other Matrox PowerDesk settings, make sure correct software monitor settings are selected. The following explains how to do this.

WARNING: If incorrect software monitor settings are applied, *some* monitors can be permanently damaged. For more information, see your monitor manual.

9x 2k Windows 95/98/2000 – If you have a Plug-and-Play (DDC) monitor, Windows should automatically use the correct settings for your monitor. To make sure the correct monitor is selected in Windows:

1 Right-click your Windows desktop background, then click **Properties** \rightarrow **Settings**.

- 2 Depending on what version of Windows you have, click Change Display Type, or Advanced Properties → Monitor, or Advanced → Monitor.
- **3** If the monitor name listed doesn't match your monitor, click the **Change** button to select a new monitor name. Follow the on-screen instructions.

For more information on Windows monitor settings, see Windows documentation.



- Windows 95/98 If you want to customize your Windows monitor settings:
 - 1 Access the PowerDesk Monitor Settings property sheet (see "Accessing PowerDesk property sheets", page 6).
 - 2 Depending on what you want to do, click one of the buttons in the **Monitor settings** selection method box, then follow the on-screen instructions.

Windows NT 4.0 –

- 1 Click Start → Programs → Matrox PowerDesk NT → Matrox Display Properties → Monitor.
- 2 If you have a Plug-and-Play monitor: Make sure the Plug-and-Play (DDC) monitor button is

selected. If so, the Matrox display driver *automatically* uses the correct settings for your monitor. If not, click this button, then click **Apply**.

If you don't have a Plug-and-Play monitor:

Default monitor (60 Hz)

Plug-and-Play (DDC) monitor

See if the **Default monitor (60 Hz)** button is selected. If

so, use the Matrox monitor selection method. For more information on Matrox monitor selection, see Matrox PowerDesk online documentation.

Notes:

- If you're using BNC connectors with a Plug-and-Play monitor, the Plug-and-Play feature of your monitor can't be used. To use the Plug-and-Play feature of your monitor, instead of the BNC connectors, use the 15-pin connector at the back of your monitor.
- In Windows 95/98, Matrox monitor settings are based on Windows monitor settings. If you change your Windows monitor settings, you may have to reselect or readjust your Matrox monitor settings.
- In multi-display mode (see "DualHead Multi-Display setup"), each monitor has its own monitor settings (refresh rates).

DualHead Multi-Display setup

If your Matrox graphics card has a second monitor connector (see page 4), you can enable a second display (for example, a computer monitor or a TV) as part of your Windows desktop. This is the Matrox *DualHead Multi-Display* feature. To use this feature:

Windows 98 –

- 1 Access the PowerDesk DualHead property sheet (see "Accessing PowerDesk property sheets", page 6).
- 2 Select the DualHead Multi-Display option button.
- **3** Click $OK \rightarrow Yes$ to restart your computer and for changes to take effect.
- 4 If multi-display mode isn't automatically enabled when you restart Windows:
 - a Right-click your Windows desktop background, then click Properties → Settings.
 - **b** Select the disabled display, enable the **Extend my Windows desktop onto this monitor** check box, then click **OK**.

Windows 2000 -


- Access the PowerDesk DualHead property sheet (see "Accessing PowerDesk property sheets", page 6).
- 2 Select the DualHead Multi-Display option button.
- **3** Click **Multi-Display Settings** to adjust your DualHead Multi-Display settings. Click **OK** when you're done.
- 4 Click $OK \rightarrow OK$ for changes to take effect.
- 5 Move the Screen area slider to adjust your display resolution and to select single-display or DualHead Multi-Display mode. A DualHead Multi-Display resolution is twice as wide or tall as its corresponding single-display resolution. For example, 640 × 480 is a single-display resolution and 1280 × 480 is a DualHead Multi-Display resolution.
- 6 Click **OK** to accept your changes.

Note: In DualHead Multi-Display mode under Windows 2000, Windows treats the main and secondary displays as a single display (which the Matrox display driver divides between two monitors). As a result, these displays always use the same resolution and color palette settings. The resolution of both displays is limited by the display with the lower maximum resolution.



Windows NT 4.0 -

- 1 Click Start → Programs → Matrox PowerDesk NT → Matrox Display Properties → DualHead.
- 2 Select the DualHead Multi-Display option button.
- **3** Click $OK \rightarrow Yes$ to restart your computer and for changes to take effect.
- 4 Click Start → Programs → Matrox PowerDesk NT → Matrox Display Properties → Settings.
- 5 Click Multi-Display Desktop (



accept your changes.

Note: In multi-display mode under Windows NT 4.0, the same display resolution and color palette is used for each display.

Other DualHead features

If your Matrox graphics card has a second monitor connector you can also use these features:

Windows 95/98/2000 or NT 4.0 -

- DualHead Clone View a copy of your main display on your secondary display. Each display can use different monitor settings (refresh rates).
- DualHead Zoom Use your secondary display to view a zoomed-in portion of your main display.

Windows 95/98/2000 -

 DualHead DVDMax – Play digital video in a window on your main display and, at the same time, view that video full-screen on a TV.

More PowerDesk information

For more information on Matrox PowerDesk:

Windows 95/98/2000 or NT 4.0 –

For context-sensitive help where available, click the "?" icon in the title bar, then click the item you want help on. Right-click a help topic for a pop-up menu that lets you print or copy it. (Some help topics are only available through context-sensitive help.)



Windows 95/98/2000 -

Access the PowerDesk Information property sheet (see "Accessing PowerDesk property sheets", page 6), then click Help or View Readme File.



Windows NT 4.0 -

- Click Start → Programs → Matrox PowerDesk NT → Matrox Display Properties → Information.
- Click Start → Programs → Matrox PowerDesk NT → Matrox PowerDesk Guide.
- Click Start → Programs → Matrox PowerDesk NT → Readme.

Troubleshooting

This section addresses possible problems that could prevent you from using your computer.

Problem Computer doesn't display information or boot after Matrox card is installed

- **Cause** Your Matrox card may not be properly installed.
- **Solution** Make sure your Matrox card is properly installed. Specifically, make sure the card is firmly inserted in its expansion slot and that all connections to it are firmly in place. For more information, see "Hardware installation", page 2.
 - **Cause** There may be an unsupported graphics adapter in your computer. (For Matrox *multi-display mode* in Windows NT, all graphics cards in your computer must be Matrox cards supported by the display driver.)
- **Solution** If an unsupported graphics card is plugged into an expansion slot, remove it.
- **Solution** If a graphics adapter is built-in to your computer motherboard, your system may not have automatically disabled it when you inserted your Matrox card. Check your system manual for instructions on how to disable your computer's built-in graphics adapter.
 - **Cause** Your computer BIOS (Basic Input/Output System) may not be up to date. For more information on your computer BIOS, see your system manual.
- **Solution** Reinstall your previous graphics card and, if possible, update your computer BIOS. This can usually be done with software from the manufacturer of your computer. Contact your system vendor or manufacturer to get a BIOS update for your computer.

To get the correct BIOS update, you may need to know the serial number your computer displays when it restarts. (This number is usually in the lower-left corner of the display.)

- **Cause** The BIOS of your Matrox graphics card may need to be updated or restored.
- **Solution** For advanced users If you have another VGA-compatible graphics card (ISA or PCI), you can try resetting the BIOS of your Matrox graphics card.
 - 1 Turn off your computer and insert the other graphics card into an expansion slot. For more information on expansion slots, see "Locate the AGP slot in your computer", page 2.
 - 2 Plug your monitor into the other graphics card and restart your computer.

- **Note:** Make sure your computer uses the other graphics card to control your primary display. Your *primary display* is the one that first displays information when your computer restarts. For more information, see "Using multiple displays…", page 16, solutions 2 and 3.
 - **3** Make sure **Matrox System Utilities** are installed on your computer. (These can be installed from your Matrox CD-ROM.)
 - **4** Restart your computer in DOS mode, then type:


cd c:\matrox\util [Enter] *upbiosdos* [Enter]

- **5** Turn off your computer, remove the other graphics card, then plug your monitor into your Matrox graphics card.
- 6 Restart your computer.

A

Problem Wrong color balance, screen image off-center, or no picture at all


- **Cause** Your monitor video controls may be improperly set.
- **Solution** Adjust your monitor controls (brightness, contrast and so on). For more information, see your monitor manual.
- **Cause** Your monitor may not be properly connected.
- **Solution** Make sure your monitor is connected to the correct connector on your Matrox graphics card (see "Connect the monitor", page 3).
- **Solution** Make sure the monitor power cable is firmly in place.
- **Solution** Make sure the 15-pin connector to your Matrox graphics card is firmly in place.



15-pin connector

Solution Make sure the connection to the back of the monitor is firmly in place. This could be a 15-pin or BNC connection.

If your monitor uses BNC input, make sure the Red (**R**), Green (**G**), Blue (**B**), Horizontal Sync (**HSYNC** – white or gray wire), and Vertical Sync (**VSYNC** – black wire) connections are firmly in place and plugged into the correct input.



- **Cause** If your monitor uses BNC input, one or more connection settings may be incorrect.
- **Solution** Set each of your monitor RGB input and sync switches (if available) to 75 ohms, with the sync set to "external". These controls are usually switches on the back of your monitor.
 - **Cause** If display problems occur after the startup screen of your operating system, your software monitor settings may be incorrect.
- **Solution** Make sure correct software monitor settings are selected.
 - If your primary display is still usable, see "Monitor setup", page 6. Otherwise, see the next troubleshooting item.

Problem After the startup screen, or after display settings are changed, the screen image is garbled or unusable (blank screen, rolling or overlapping screen images)

Cause The Matrox display driver may be trying to use settings your monitor doesn't support. This can happen if a monitor was never selected in the software and the display resolution was changed to one your monitor doesn't support, or if the monitor connected to your computer

WARNING: If incorrect software monitor settings are applied, *some* monitors can be permanently damaged. For more information, see your monitor manual.

Windows 95/98/2000 -



Α

1 If your primary display is unusable:

was changed without changing it in the software.

a Windows 95/98 – Press [Ctrl]+[Alt]+[Del] twice to restart your computer.
 Windows 2000 – Press [Ctrl]+[Alt]+[Del] → [Tab] → [Tab] → [Enter] → [↓] (down arrow) → [Enter] to restart your computer.

- **b** *Before* Windows starts, press [F8] for the Windows startup menu to appear. (With Windows 98, if [F8] doesn't work, instead try pressing and holding [Ctrl] before Windows starts.)
- **c** Select "safe mode", then press [Enter].
- 2 Right-click the Windows desktop background, then click **Properties** \rightarrow **Settings**.
- **3** Move the **Desktop area** (Windows 95) or **Screen area** (Windows 98/2000) slider down to its lowest setting, then click **OK**.
- **4** Restart your computer normally.
- 5 Make sure the correct monitor is selected in Windows (see "Monitor setup", page 6).
- 6 Windows 95/98 Make sure you're not using inappropriate monitor setting customizations: Access the PowerDesk Monitor Settings property sheet (see "Accessing PowerDesk property sheets", page 6), then click Delete all customizations.
- **7** Restore your original display settings (see steps 2 and 3).

1 Note: In multi-display mode (see "DualHead Multi-Display setup"), each monitor has its own monitor settings (refresh rates).

Windows NT 4.0 -

- **1** If your primary display is unusable:
 - a Press [Ctrl]+[Alt]+[Del] → [Tab] → [Tab] → [Enter] → [↓] (down arrow) → [Enter] to restart your computer.
 - **b** From the startup menu, choose "VGA mode".
- 2 Right-click the Windows desktop background, then click **Properties** \rightarrow **Settings**.

Windows may prompt you that the display settings are incorrect for the current mode; click **OK** to continue.

- **3** Move the **Desktop area** slider down to its lowest setting, then click **OK**.
- 4 Restart your computer normally.
- 5 Select a monitor with the Matrox PowerDesk Monitor property sheet, then adjust your display settings. For more information, see the Matrox PowerDesk online documentation.

Cause Files on your system may have been deleted or corrupted.

Solution Remove, then restore Matrox software:

Note: Before removing software, make sure you have all the necessary files to reinstall software that may still be needed. Also, make sure the display driver you reinstall supports *all* Matrox products in your computer.

Windows 95/98/2000 or NT 4.0 –

1 If primary display is currently unusable:

Windows 95/98 -

- **a** Press [Ctrl]+[Alt]+[Del] twice to restart your computer.
- **Before** Windows starts, press [F8] for the Windows startup menu to appear. (With Windows 98, if [F8] doesn't work, instead try pressing and holding [Ctrl] before Windows starts.)
- c Select "safe mode", then press [Enter].

Windows 2000 -

- a Press [Ctrl]+[Alt]+[Del] → [Tab] → [Tab] → [Enter] → [↓] (down arrow) → [Enter] to restart your computer.
- **b** *Before* Windows starts, press [F8] for the Windows startup menu to appear.
- c Select "safe mode", then press [Enter].

Windows NT 4.0 -

- a Press [Ctrl]+[Alt]+[Del] → [Tab] → [Tab] → [Enter] → [↓] (down arrow) → [Enter] to restart your computer.
- **b** From the startup menu, choose "VGA mode".
- 2 Remove Matrox software by running the separate uninstall program included with Matrox System Utilities. For more information, see the *Readme* file on your Matrox installation CD-ROM.
- **3** After removing Matrox software, install the latest display driver for your Matrox graphics card. You may also need to reinstall other Matrox software.

Problem Using multiple displays under Windows 98/2000 or NT 4.0, program (for example, a game) doesn't work with main graphics card

Cause Your main graphics card may not be controlling your primary display. Your *primary display* is the one that first displays information when your computer restarts. Programs that don't recognize multiple displays may not work with a graphics card unless it's controlling your primary display.

Your computer BIOS (Basic Input/Output System) and the slot type (ISA, PCI or AGP – see "Locate the AGP slot in your computer", page 2) of each graphics card help determine which graphics card controls your primary display.

- **Solution** If you're having problems with a program that can be moved on your Windows desktop, run this program on your primary display. Make sure the program window doesn't overlap any other display. If the program doesn't work with the graphics card controlling your primary display, or you want your main graphics card to control your primary display, see the other solutions.
- **Solution** Change the configuration of your computer BIOS so that the slot type of your main graphics card has priority for becoming the primary display. For information on how to change your computer BIOS settings, see your system manual.

If your computer BIOS doesn't let you select which slot type has priority for becoming the primary display, a BIOS update may be available to let you do this. (The BIOS of most computers can be updated with software.) For a possible BIOS update for your computer, contact your system vendor.

- **Solution** If there's a graphics controller built into the motherboard of your computer, by changing your computer BIOS settings, you may be able to change which device controls your primary display. For more information, see your system manual.
- **Solution** If you don't need to use the graphics card that's controlling your primary display, remove it from your computer. If your primary display is controlled by the motherboard of your computer, see your system manual for information on how to disable this graphics controller.
 - **Cause** The program you're using may not work properly with systems using more than one display at a time.
- **Solution** An update may be available for the program you're using. This update may fix problems this program has with multi-display systems. For more information, contact the software distributor for the program you're using.

More information

We provide additional documentation in help files, *Readme* files, and Adobe Acrobat PDF (Portable Document Format) files. To view or print PDF files, use the **Acrobat Reader** program, which you can install from the Matrox installation CD-ROM. This guide is available on the CD-ROM as a PDF file (*Doc**English\Guide\Guide_en.pdf*).

The online version of this guide has additional information, including the following sections: "TV output", "Extra troubleshooting", "Display information", "Hardware information", "Customer support", "Warranty", and "Software license agreement".

"Extra troubleshooting" includes:

- Can't use Windows, Windows reports a configuration error, and/or can't install or uninstall Matrox display driver
- After game for Windows 95/98/2000 starts, monitor doesn't display properly
- Matrox Diagnostic or setup program reports an IRQ problem
- Game for Windows 95/98 doesn't start or runs slower than normal
- After restarting computer, Windows 95/98 warns that the graphics card isn't configured correctly
- Not all graphics cards in the computer are fully supported
- Screen image defects appear or program doesn't run properly
- Video file playback is jerky (skipping frames)
- DVD video playback is jerky (skipping frames)
- Can't play certain DVD videos
- TV image is garbled or unusable
- Computer text is hard to read with a TV
- Poor TV or video recorder image quality
- Can't record video with a video recorder
- Sound doesn't record, video files play back with no sound, or sound output is distorted or too loud
- **(i)** Note: Be sure to check for any last-minute release notes at the end of this manual and in the Matrox CD-ROM *Readme* file.

TV output

If your Matrox graphics card has a second monitor connector, you can connect it to a TV or video recorder. This section describes how to use a TV or video recorder with your Matrox graphics card.

Connection setup

1 Turn off computer

9x NT 2k

A


Windows 95/98/2000 or NT 4.0 – To shut down your computer, click 33 Start \rightarrow Shut Down \rightarrow Shut down \rightarrow OK, then turn off your computer.

WARNING: Don't change monitor connections while your computer is turned on. While your computer is turned on, it may be using monitor settings that are specific to the current monitor connections.

If a display device (monitor, TV or video recorder) is connected while your computer is using settings intended for another display device, the display of the new device may be garbled or unusable. *Some* devices may be permanently damaged if incorrect settings are used.

2 Attach TV adapter

Attach the TV adapter included with your Matrox graphics card to the second monitor connector (connector **2**) on your card.





3 Connect video output

To connect to a TV or video recorder, you'll need the TV adapter included with your Matrox graphics card and you'll need a composite or S-video cable.

If your video device (TV or video recorder) didn't come with composite video (RCA) or S-video cables, this type of cable is available at most electronics stores. The type you use depends on what your video device (TV or video recorder) supports. Many video devices support composite video connections, and some higher-quality video devices support S-video connections.

- **a** Attach one end of your composite video or S-video cable to the appropriate connector on your TV adapter.
- b Attach the other end to the VIDEO IN* connector on your TV[†] or video recorder.
- c Before viewing or recording video output directly from your computer, make sure your TV or video recorder is set up to use *line* input. For example, if your TV has a **TV/VIDEO** switch, set it to **VIDEO**; or if your video recorder has a **TUNER/LINE** switch, set it to **LINE**.

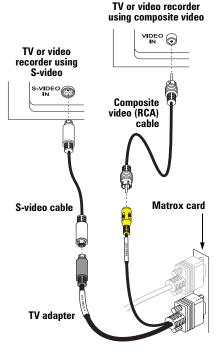



Optionally, if you use the composite video *and* S-video connectors on your Matrox TV adapter, you can directly connect two different video devices at the same time.

To view *and* record output from the same Matrox video connector, you can connect it to a video recorder and connect the video recorder to a TV. For more information, see your video recorder and TV manuals.


^{*} The labels on your devices may not be consistent with what's in this guide. Different manufacturers sometimes use different labels for the same type of controls and connectors. For example, the VIDEO IN connector on your TV may be labeled VIDEO 1 (or VIDEO 2). To match labels, see the documentation for your video devices.

[†] If your TV only has an antenna or cable TV connector, you can use an RF modulator to connect it to your Matrox card. RF modulators are available at most electronics stores.

4 Connect audio output

Typically, the sound output from a computer comes from speakers connected to your sound card. If you prefer, you can hear or record the sound output from your computer using the same TV or video recorder you connect to your graphics card. To do this, you need an audio cable with a stereo jack on one end and two RCA connectors on the other end. If you don't have this type of cable, you can buy one at most consumer electronics stores.


- Plug the stereo-jack end of the audio cable into the LINE OUT* connector on your sound card.
- Plug the other end of the cable into the left
 (L) and right (R) AUDIO IN connectors of your video device. For more information, see your sound card manual.



SCART adapter

Some video devices in Europe only have SCART connectors. This type of connector includes video *and* audio, whereas composite video or S-video connectors include only video.

If your TV or video recorder *only* uses a SCART connector, you need a SCART cable adapter to connect your computer to that TV or video recorder. If you don't already have a SCART adapter, you should be able to purchase one from your local electronics store. You need a SCART adapter with *3 connectors* – 2 audio and 1 video. There are different SCART adapters for composite video and S-video. If you're not sure which your TV or video recorder supports, see its manual.



To use a SCART adapter, connect the SCART end of the adapter to your TV or video recorder, then connect the other end to your Matrox TV adapter *and* sound card.

^{*} If your sound card has no LINE OUT connector, you can use its SPKR connector instead. In this case, all your computer's sound output goes to the video device you connected to.

Software setup*

If a TV or video recorder is connected to the second monitor connector on your Matrox graphics card, you can use TV output mode to view or record your display on your TV or video recorder. (To connect video devices to your computer, see page 18.)

While in TV output mode, your computer display may use TV settings. TV settings have lower resolutions and refresh rates than typical computer monitor settings. Lower refresh rates may result in more noticeable flicker.

WARNING: Because *some* computer monitors don't support TV settings, a computer monitor may become garbled or unusable if it uses TV settings. If this happens, you can simply turn off your computer monitor and use your TV to view your computer display.

Also, *some* computer monitors may be damaged if they use the 50 Hz vertical refresh rate used with European TV settings. For more information, see your monitor manual.

Note: Two TV standards are supported for TV output. The NTSC standard is used in North America and Japan, among other places. The PAL standard is used in most of Western Europe and in China, among other places.

If an incorrect TV standard is selected in Matrox software, the output from your computer may not appear or record properly on your TV or your video recorder. To find out what standard your TV or video recorder supports, see its documentation.



- Windows 98/2000 To add a TV to your Windows desktop, see "DualHead Multi-Display setup", page 8.
- Windows 95/98/2000 or NT 4.0 To use TV output, you can use the *DualHead Clone*, *DualHead Zoom*, or *DualHead DVDMax*[†] features (see "Other DualHead features", page 9).
- Windows 95/98/2000 To adjust TV settings, access the Matrox PowerDesk DualHead property sheet (see "Accessing PowerDesk property sheets", page 6). To adjust advanced desktop TV settings, click Desktop TV Settings. To adjust advanced DVDMax TV settings, click DVDMax TV Settings.

^{*} To enable TV output support for DOS display modes, use **Matrox System Utilities**. You can install this software from your Matrox installation CD-ROM. For more information, see the *Readme* file included with this software.

[†] Under Windows NT 4.0, the DualHead DVDMax feature isn't supported.

Note: With the DualHead Clone feature (Windows 95/98/2000), you can avoid using TV settings with your computer monitor. You can do this by enabling the **Keep optimal refresh** when possible check box in the **DualHead Clone Options** dialog box.

Windows NT 4.0 – To adjust TV settings, click Start → Programs → Matrox PowerDesk NT → Matrox Display Properties → Monitor. To adjust advanced TV settings, click Advanced TV Settings.

For more information on how you can use your secondary display, see PowerDesk online help.

Extra troubleshooting

Note: The latest Matrox software for your product is available on the Web (www.matrox.com/mga).

Graphics

The following troubleshooting items address problems related to graphics cards.

Problem Can't use Windows, Windows reports a configuration error, and/or can't install or uninstall Matrox display driver

- **Cause** Files on your system may have been deleted or corrupted.
- Solution Remove, then restore Matrox software. For more information, see page 15.

Solution

Windows 95/98 – For advanced users – Manually remove any old or new display drivers, then reinstall the latest display driver for your Matrox graphics card:

- Restart your computer, then *before* Windows starts, press [F8] to see a startup menu. (With Windows 98, if [F8] doesn't work, instead try pressing and holding [Ctrl] before Windows starts.)
- 2 Select "safe mode", then press [Enter].
- 3 Right-click the My Computer icon on the Windows desktop background, then click Properties → Device Manager.
- 4 Click the plus sign next to **Other devices** (if it appears) and **Display adapters**. Delete all listed display adapters (click each, then click **Remove**), then click **OK**.
- 5 In the following folders, remove all files or folders related to "PowerDesk" (*pd**.*), "Matrox" or "MGA". (For more information on some files, right-click on them in Windows Explorer, then click **Properties** → **Version**. The following paths assume default installations and may be different on your computer.)

- C:\Windows\Start Menu\Programs\StartUp
- C:\Windows\Startmenu\Programs
- C:\Windows\System
- C:\Program Files

A

Note: Recent versions of Matrox PowerDesk for Windows 95/98 (5.x and later) install files only to your Windows System folder.

- 6 Click **Start** \rightarrow Run, type *regedit*, then click OK.
- 7 Under HKEY LOCAL MACHINE \rightarrow SOFTWARE, remove all items starting with "Matrox" or "MGA".
- A Note: Recent versions of Matrox PowerDesk for Windows 95/98 (5.x and later) store registry settings under HKEY_CURRENT_USER → SOFTWARE. *Your* settings under HKEY_CURRENT_USER are only accessible if you're logged into Windows with your user name.
 - 8 Restart your computer, then install the latest display drivers for your Matrox graphics card. You may also need to reinstall other Matrox software.

Problem After game for Windows 95/98/2000 starts, monitor doesn't display properly 9x (blank screen, rolling or overlapping screen images)

Cause If your game uses a low-resolution (640 × 480 and below), full-screen display mode, your monitor may not support the refresh rate the Matrox driver is using.

Solution Windows 95/98/2000 -

9x

Mg_x

- **1** If the game is still running in full-screen mode and your monitor is unusable, exit the game. To do this, press [Alt]+[Tab] once, right-click the name of the game on the Windows taskbar, then click Close.
- 2 Make sure the correct monitor is selected in Windows (see "Monitor setup", page 6).

Solution Windows 95/98 -

- **1** If the game is still running in full-screen mode and your monitor is unusable, exit the game. To do this, press [Alt]+[Tab] once, right-click the name of the game on the Windows taskbar, then click Close.
- **2** Access the Matrox PowerDesk **Monitor Settings** property sheet (see "Accessing PowerDesk property sheets", page 6).

- 3 Click Select customizations from the Matrox list.
- 4 From the Matrox monitor list, select the monitor model you're using. If your monitor model doesn't appear in the list, select a monitor that runs at 60 Hz at 640 × 480 (for example, Standard monitor types → Vesa 1024X768 @60Hz → Next). Follow the on-screen instructions to complete the selection.

Problem Matrox Diagnostic or setup program reports an IRQ problem (3D and video programs don't work)

- **Cause** Your computer or program may not work well with bus mastering.
- Solution Disable bus mastering: (If you want to continue using bus mastering, see the other solutions.)



Windows 95/98/2000 -

- 1 Access the Matrox PowerDesk **Options** property sheet (see "Accessing PowerDesk property sheets", page 6).
- 2 Clear the Use bus mastering check box.
- **3** Click $OK \rightarrow OK \rightarrow Yes$ to accept the changes and restart your computer.

Windows NT 4.0 -


- 1 Click Start → Programs → Matrox PowerDesk NT → Matrox Display Properties → Performance.
- 2 Clear the Use bus mastering check box.
- **3** Click $OK \rightarrow Yes$ to accept the changes and restart your computer.
- **Cause** Your computer may not have given an interrupt request (IRQ) to your Matrox graphics card or may have given one used by another device in your computer. This may be because your computer's "Plug-and-Play" feature is turned off.



Windows 95/98/2000 – To check the display adapter's IRQ:

- 1 Right-click the My Computer icon on the Windows desktop background, then:
 - Windows 98 click Properties → Device Manager.
 - Windows 2000 click Properties → Hardware → Device Manager.
- 2 Click the plus sign to the left of the **Display adapters**. An "**X**" through an icon means the hardware has been disabled. A circled exclamation point through the icon means the hardware has a problem.

3 Double-click the name of your Matrox display adapter to open a properties dialog box. The type of problem is displayed in the General tab → Device status area. Check also the



Resources tab \rightarrow **Resource type** list for an **Interrupt Request**.

Solution Change settings in your computer CMOS setup utility.

If your computer has the options of enabling Plug-and-Play detection, or assigning an IRQ to a VGA adapter, make sure they're enabled. If your computer doesn't have these options, you may be able to manually assign an IRQ to your graphics card using the CMOS setup utility.

For more information on your computer's CMOS setup utility, see your system manual or contact your system manufacturer.



Windows 95/98 – Other devices in your computer may have IRQs unnecessarily allocated to them. Each time cards are moved to different expansion slots in your computer, new IRQs may be allocated without old ones being deallocated.

Solution For advanced users – Remove and restore device drivers.

Note: Before removing software, make sure you have all the necessary files to reinstall software that may still be needed.

- Restart your computer, then *before* Windows starts, press [F8] to see a startup menu. (With Windows 98, if [F8] doesn't work, instead try pressing and holding [Ctrl] before Windows starts.)
- **2** Select "safe mode", then press [Enter].
- 3 Right-click the My Computer icon on the Windows desktop background, then click Properties → Device Manager.
- 4 Under Display adapters, Network adapters, or SCSI controllers, remove any redundant or unused device drivers. To remove a driver, select its name, then click Remove. (If you're not sure whether a driver is redundant or unused, you can remove it. When Windows restarts, Windows automatically restores needed drivers or prompts you to reinstall them.)
- **5** Restart your computer normally.

Cause Your computer's other BIOS settings may be incorrect.

Solution Reset your computer BIOS settings to the factory defaults using your computer's built-in CMOS setup utility. The factory defaults are usually the "safest" settings. Check your system manual for more information.

Problem Game for Windows 95/98 doesn't start or runs slower than normal (program uses Microsoft DirectX interface)

- **Cause** An older version of DirectX may be installed. The Matrox CD-ROM setup program installs DirectX, but some programs install an older version of DirectX (overwriting your version). To see what version of DirectX is installed:
 - 1 Access the Matrox PowerDesk Information property sheet (see "Accessing PowerDesk property sheets", page 6).
 - 2 Look at the Microsoft DirectX label.
- **Solution** If DirectX 7.0 or later isn't installed, install it. Run the setup program from the *DirectX* folder of the Matrox installation CD-ROM.

Problem After restarting computer, Windows 95/98 warns that the graphics card isn't configured correctly

- **Cause** You may have a conflict because of previously installed display drivers.
- Solution Delete all existing display drivers and reinstall Matrox display drivers.
 - 1 If Windows prompts you to start the Add New Hardware Wizard, click Cancel. (If you start the Wizard, it will *not* detect your graphics card.)
 - 2 Right-click the My Computer icon on the Windows desktop background.
 - 3 Click Properties → Device Manager.
 - 4 Click the plus sign next to Other devices (if it appears) and Display adapters.
 - 5 Delete *all* listed display adapters (click each, then click Remove), then click OK.
 - 6 Restart your computer and reinstall the Matrox display drivers (see page 5).



Problem Not all graphics cards in the computer are fully supported

(Software doesn't work with a certain graphics card, or another graphics card doesn't work at all)

Cause If you have different models of graphics cards in your computer, your Matrox display driver may not support all the graphics cards in your computer.

Under Windows 98/2000, a display driver may support one or more graphics cards. If a display driver doesn't support a certain card, a different display driver must be used for that card. Software that depends on a certain display driver may not work with a graphics card that's not using the same display driver.

Under Windows NT 4.0, only one display driver at a time may be used. To use more than one graphics card, the display driver must support all the graphics cards installed. If an unsupported graphics card is installed in your computer, that card either isn't used or your computer restarts in VGA mode (single-display, 640×480 resolution, 16 colors).

- Solution Install the latest unified display driver for your Matrox graphics cards. (A *unified* display driver supports more than one model of graphics card.) This driver is available on the Matrox Web site (<u>www.matrox.com/mga</u>). Make sure that the display driver supports all Matrox products in your computer. Install the display driver by running the setup program included with it.
 - **Note:** A unified Matrox display driver may not be available for all the models of Matrox graphics cards installed in your computer (especially for older models). Under Windows 98/2000, you can use more than one display driver in this case.
- **Solution** If a graphics card isn't supported, you may need to remove it. If there's a graphics processor built into the motherboard of your computer that's not supported by your software, see your system manual for information on how to disable this graphics processor.
 - Cause Windows 98/2000 If the Windows method for display driver installation was used (instead of running the setup program included with your Matrox display driver), the driver may not be installed for all the graphics cards it supports.
- **Solution** Run the setup program included with the Matrox display driver. The setup program automatically installs the display driver for each Matrox graphics card it supports.

Problem Screen image defects appear or program doesn't run properly (example: mouse pointer not drawn properly)

- **Cause** Some programs may not work properly with some Matrox acceleration.
- Solution Disable specific types of software acceleration:



- 1 Access the Matrox PowerDesk **Options** property sheet (see "Accessing PowerDesk property sheets", page 6).
- **2** Clear one or more check boxes, starting with **Use device bitmaps caching**. For more information, see context-sensitive help.
- **3** Click $OK \rightarrow Close$ to accept the changes. (Depending on the feature you disabled, you may have to restart your computer for the changes to take effect.)
- Windows NT 4.0 -
 - 1 Click Statt → Programs → Matrox PowerDesk NT → Matrox Display Properties → Performance.
 - 2 Clear one or more check boxes. For more information, see context-sensitive help.
 - 3 Click OK → Yes to accept the changes. (Depending on the feature you disabled, you may have to restart your computer for the changes to take effect.)
- **Solution** If possible, update your Matrox display driver. Matrox makes new display drivers available on the Matrox Web site (*www.matrox.com/mga*) and BBS (see page 45).
- **Solution** Disable Matrox hardware acceleration:

Windows 95/98 –

- 1 Right-click the My Computer icon on the Windows desktop background.
- 2 Click Properties \rightarrow Performance \rightarrow Graphics.
- **3** Move the Hardware acceleration slider to None.
- 4 Click $OK \rightarrow Close \rightarrow Yes$ to accept the changes and restart your computer.

Windows 2000 –

- Right click your Windows desktop background, then click Properties → Settings → Advanced → Troubleshooting.
- 2 Move the Hardware acceleration slider to None.
- **3** Click $OK \rightarrow OK$ to accept the changes.

Cause Windows 95/98 – There may be a conflict between resources in your system.



Right-click the My Computer icon on the Windows desktop background, then click
 Properties → Device Manager.

- 2 Click the plus sign next to Other devices (if it appears) and Display adapters.
- 3 Delete any display adapter *other than* the one for your Matrox graphics card.
- 4 Restart your computer.

1 Note: If you identify a program that doesn't work well with Matrox acceleration, please contact Matrox technical support (see page 46) and describe the problem. This information may help us come up with a fix or work-around in a future driver release.

Video

The following troubleshooting items address problems related to video files.

Problem Video file playback is jerky (skipping frames)

1 Note: Jerky video file playback may be the result of slow playback or recording. Slow recording causes frames to be dropped (frames aren't recorded). If jerky video is caused by frames that were dropped during recording, the problem can only be fixed by recapturing the video under better conditions.

Cause Your hard disk may be too slow.

Solution Try *defragmenting* your hard disk.

Windows 95/98/2000 – To defragment a hard disk, click $\texttt{RStart} \rightarrow \texttt{Programs} \rightarrow \texttt{Accessories} \rightarrow \texttt{System Tools} \rightarrow \texttt{Disk Defragmenter}.$

Solution If possible, try using a faster disk.

Tip: If your computer has more than one hard disk, you may get better results if you play back video files from a disk *other than* the one where the Windows swap file is stored. The Windows swap file is usually stored on drive "*C*.".

Solution Make sure your hard disk is using DMA (if your hard disk supports DMA transfers). To use DMA:

WARNING: Not all hard disks support DMA well. For more information, see the documentation that came with your hard disk.

Windows 95/98 –

- Right-click the My Computer icon on your Windows desktop background, then click Properties → Device Manager.
- **2** Double-click the **Disk drives** list item to expand it, then double-click the name of the hard disk you're using.
- **3** Click **Settings**, then enable the **DMA** check box.
- 4 Click $OK \rightarrow OK \rightarrow Yes$ to restart your computer and for changes to take effect.

Windows 2000 –

- Right-click the My Computer icon on your Windows desktop background, then click Properties → Hardware → Device Manager.
- 2 Double-click the IDE ATA/ATAPI controllers list item to expand it, then double-click the name of the appropriate controller.
- 3 Change each Transfer Mode setting to "DMA if available".
- 4 Click **OK** to accept the changes.
- Windows NT 4.0 Install a DMA driver. For most computers, a DMA driver is available for Windows NT 4.0 (for example, the "PIIX Bus Master IDE" driver supports many computers). For more information on how to get this driver, contact your system vendor.
- **Cause** Too many programs may be running (using up computer resources).
- Solution Close other programs, including memory-resident programs like System Agent.

- **Cause** Your display settings may be too high. As a result, video file playback may not be fully supported by Matrox hardware.
- Solution Try lowering your display settings. We recommend a 1024×768 or lower display resolution with a 16-bit color palette.

To access display settings:

- Windows 95/98/2000 Right click your Windows desktop background, then click Properties → Settings.
- Windows NT 4.0 Click Start → Programs → Matrox PowerDesk NT → Matrox Display Properties → Settings.
- **Cause** Your Matrox graphics card may be sharing an IRQ (interrupt request) with another PCI card in your computer (for example, a network card).



V9x

Windows 95/98 – To see if your graphics card is sharing an IRQ:

- Right-click the My Computer icon on your Windows desktop background, then click Properties → Device Manager → Properties.
- **2** Look in the list box to see if your Matrox graphics card is assigned the same IRQ number as another PCI card in your computer.
- **Solution** Try moving the PCI card to another PCI slot in your computer. For more information, see the documentation for this card or see your system manual.

DVD

The following troubleshooting items address problems related to DVD. (For general video-related troubleshooting items, see "Video", page 30.)

Problem DVD video playback is jerky (skipping frames) Cause Your DVD drive may be too slow. Solution If your DVD drive supports DMA transfers, enable this feature. WARNING: Not all DVD drives support DMA well. For more information, see the documentation that came with your DVD drive.



- Windows 95/98 To enable DMA for a DVD drive:
- Right-click the My Computer icon on your Windows desktop background, then click Properties → Device Manager.
- **2** Double-click the **Disk drives** list item to expand it, then double-click the name of the DVD drive you're using.
- **3** Click **Settings**, then enable the **DMA** check box.
- 4 Click $OK \rightarrow OK \rightarrow Yes$ to restart your computer and for changes to take effect.

Windows 2000 -

- Right-click the My Computer icon on your Windows desktop background, then click Properties → Hardware → Device Manager.
- **2** Double-click the **IDE ATA/ATAPI controllers** list item to expand it, then double-click the name of the appropriate controller.
- 3 Change each Transfer Mode setting to "DMA if available".
- 4 Click **OK** to accept the changes.
- Windows NT 4.0 Install a DMA driver. For more information on how to get this driver, contact your system vendor.

Problem Can't play certain DVD videos

- **Cause** A DVD video may not play back because the region setting on your DVD player doesn't match the region code on the DVD-ROM disc. DVD players and videos use region codes to prevent the playback of video that was intended only for a certain region or market.
- **Solution** To get a copy of a DVD video that's compatible with the region code of your DVD player, contact the vendor of that video.

TV output

The following troubleshooting items are related to TV output support (see "TV output", page 18).

Problem	TV image is garbled or unusable
	(a blank screen, or rolling or overlapping screen images)
Cause	Your TV or video recorder may not be properly connected.
Solution	Make sure your TV or video recorder is properly connected. For more information, see "Connection setup", page 18.

- **Cause** Your TV or video recorder may not be properly set up.
- **Solution** If a TV is connected to your Matrox graphics card and the TV has a **TV/VIDEO** switch, set it to **VIDEO**. For more information, see your TV manual.
- **Solution** If a video recorder is connected to your Matrox graphics card and the video recorder has a **TUNER/LINE** switch, set it to **LINE**. For more information, see your video recorder manual.
 - **Cause** Matrox software may not be set up for TV output. Particularly, the TV standard selected may not be correct.
- Solution Windows 95/98/2000 or NT 4.0 See "Software setup", page 21.
 - **Cause** You may be using a DOS display mode *without* your Matrox graphics card being properly configured for DOS TV output. DOS display modes are used for:
 - DOS programs that run full-screen
 - a full-screen DOS prompt under Windows
 - · text displayed before Windows starts
- Solution Make sure your Matrox graphics card is properly configured to support TV output for DOS display modes. To enable TV output support for DOS display modes, use Matrox System Utilities. You can install this software from your Matrox installation CD-ROM. For more information, see the *Readme* file included with this software.
 - **Cause** If you're using a program that runs full-screen, this program may be using a display mode that's not supported for TV output.
- **Solution** If the program offers a choice of display modes, select a display mode supported for TV output. For a list of display modes supported for TV output, see "Supported TV output modes", page 42. For information on how to change display modes with the program you're using, see its documentation.
- Solution View the program you're using with your computer monitor instead of your TV.

Problem Computer text is hard to read with a TV

Cause The resolution of a TV is lower than a typical computer display. As a result, some text may be harder to read with a TV than with a computer monitor.

Solution Lower your computer display resolution:



K Windows 95/98/2000 –

1 Right-click your Windows desktop background, then click **Properties** \rightarrow **Settings**.

- **2** Move the **Desktop area** (Windows 95) or **Screen area** (Windows 98/2000) slider to a lower setting.
- **3** Click **OK** to close the dialog box and apply changes.

Windows NT 4.0 –

- 1 Click Start → Programs → Matrox PowerDesk NT → Matrox Display Properties → Settings.
- 2 Move the **Display area** slider to a lower setting.
- **3** Click **OK** to close the dialog box and apply changes.
- **Solution** If you're using a display area larger than 640×480 , you can use larger system fonts to make some text more readable:

Windows 95/98/2000 or NT 4.0 –

1 Windows 95 – Right-click your Windows desktop background, then click Properties → Settings.

Windows 98/2000 -Right-click your Windows desktop background, then click Properties \rightarrow Settings \rightarrow Advanced \rightarrow General.

Windows NT 4.0 – Click $\exists \textbf{R} \text{Start} \rightarrow \text{Programs} \rightarrow \text{Matrox PowerDesk NT} \rightarrow \text{Matrox}$ Display Properties \rightarrow Settings.

- 2 Under Font size, select Large Fonts.
- **3** Click **OK** to close the dialog box and apply changes.

Problem Poor TV or video recorder image quality

- **Cause** Your software TV settings may need adjusting.
- **Solution** See "Software setup", page 21.
 - **Cause** There may be too many video devices between your video source and destination, or one or more of the video devices may be degrading the quality of the video signal. Demodulators, long cables, cable extensions and improper connections can all affect video signal quality.
- **Solution** If your video equipment supports it, use S-video connections. For more information, see "Connection setup", page 18.
- **Solution** Try changing one or more video devices.
- **Solution** If possible, use fewer connections. For example, don't use cable extensions.

Cause The image settings on your TV may need adjusting.

Solution Some TVs have an aperture control sometimes called **PICTURE**. Lowering this setting may reduce this problem. Reducing your TV's brightness setting may also improve image quality. For more information, see your TV manual.

Problem Can't record video with a video recorder

- **Cause** The video source may be copy protected. Your Matrox product may not let you make copies of copy-protected video. (Some video sources let you make a copy of a video, but you may not be able to make a copy of that copy.)
- **Solution** To get copies of a copy-protected video, contact the vendor of the video.

Problem Video appears stretched or squished on a TV

Cause Windows 95/98/2000 – If you're using the *DualHead DVDMax* feature to view video fullscreen on your TV, the aspect ratio of a video may not match the aspect ratio of your TV.

Solution Adjust software settings:

- Access the Matrox PowerDesk DualHead property sheet (see "Accessing PowerDesk property sheets", page 6).
- 2 Click DVDMax Options.
- 3 Select Preserve aspect ratio.
- 4 Select the aspect ratio of your TV (4:3 or 16:9 most TVs are 4:3).
- 5 Select Detect based on video window size.
- 6 Click OK or Apply for your changes to take effect.

For more information, see context-sensitive help.

Sound

The following troubleshooting items address problems related to sound cards.

Problem Sound doesn't record, video files play back with no sound, or sound output is distorted or too loud

- **Cause** If the sound problem is with a particular device (for example, TV or speaker), the volume control on the device itself may need adjusting.
- **Solution** Adjust the volume control on the device itself.
 - **Cause** Audio cables may be loose or incorrectly wired.
- **Solution** Make sure your sound card cables are properly connected (see "Connect audio output", page 20).
 - **Cause** Your sound card's Windows software settings may be incorrect. Specifically, input or output may be disabled, or volume levels may be too low or too high.

Solution Windows 95/98/2000 or NT 4.0 – Make sure your sound card's Windows software settings are correct.

1 Double-click the speaker icon (4) on the Windows taskbar.

If you *don't* see the speaker icon:

- a Click $\exists \mathbf{R}$ Start \rightarrow Settings \rightarrow Control Panel.
- **b** Double-click the Multimedia or Sounds and Multimedia icon.
- c Enable the "Show volume control on the taskbar" check box.
- d Click OK.
- e Double-click the speaker icon on the taskbar.
- **2** Click **Options** \rightarrow **Properties**.
- 3 Click the Recording button, enable all check boxes in the list box, then click OK.
- 4 For the Line In and/or Microphone controls, make sure the Volume slider levels are okay (if you're not sure, try half level), and the appropriate Select check box is enabled.
- **5** Click **Options** \rightarrow **Properties**.
- 6 Click the Playback button, enable all check boxes in the list box, then click OK.



- 7 For the Master, Line and/or Wave controls, make sure the Volume sliders are at onequarter to one-half levels (if you're not sure, try half level), and the Mute check boxes are cleared.
- 8 Close the dialog box.
- **Cause** The problem may be specific to the sound card you have.
- **Solution** For more information, see your sound card manual.

Display information

Notes

- Your Matrox graphics card is 100% VGA compatible and supports all VESA standards: VBE 2.0 (Super VGA modes), DPMS (energy saving), and DDC-2B (Plug-and-Play monitor).
- Matrox graphics cards that can support a secondary display have the Matrox *DualHead* feature. For information on which card models support this feature, see "Hardware information", page 43.



- Windows 95/98 In *DualHead Multi-Display* mode (see page 8), the graphics memory is divided equally between the main and secondary display. For example, if you have a 16 MB graphics card, the main and secondary displays each have 8 MB available to them. As a result, maximum display capabilities may be affected.
- In *DualHead Multi-Display* mode (see page 8), the secondary display only supports a 16- or 32-bit color palette.
- 3D acceleration is only available with a 16- or 32-bit color palette.
- The display resolutions available depend on your Matrox graphics card, display driver and software monitor settings. Different software monitor settings have different resolutions available to them. With your software monitor settings, some of the resolutions listed in this section may not be available, *or* resolutions not listed in this section may be available. For more information on software monitor settings with Windows 95/98/2000 or NT 4.0, see "Monitor setup", page 6.
- Many Plug-and-Play monitors don't automatically report if they're capable of 1152 × 864, or 1600 × 1200 and higher display resolutions. To use these resolutions, or higher refresh rates than those reported by the monitor, you can use the Matrox monitor selection method. To use Matrox monitor settings with Windows 95/98 or NT 4.0, see "Monitor setup", page 6.
- The maximum refresh rates listed in this section have been rounded and are based on a monitor with a maximum horizontal refresh rate of 130 kHz. Depending on your monitor, refresh rate capabilities may vary. For information on the capabilities of your monitor, see your monitor documentation.

Maximum display resolution

Aspect ratio	Main display	Secondary display
4:3/5:4 (standard)	2048 × 1536	1280 × 1024
16:9/16:10 (wide screen)	1920 × 1200	1280 × 720

Maximum vertical refresh rate (Hz)*

Access Table		Main	Secondary display	
Aspect ratio	resolution	300 MHz RAMDAC	360 MHz RAMDAC	(135 MHz RAMDAC)
	640 × 480	200	200	200
	800 × 600	200	200	180
	1024 × 768	160	160	115
	1152 × 864	140	140	95
4:3/5:4 (standard)	1280 × 1024	120	120	75
(1600 × 1200	100	100	_
	1800 × 1440	80	85	_
	1920 × 1440	75	85	_
	2048 imes 1536	70	85	_
	856 × 480	200	200	200
	1280 × 720	160	160	100
16:9/16:10 (wide screen)	1600 imes 1024	120	120	—
,,	1920 × 1080	100	110	—
	1920 × 1200	90	100	_

* Based on a monitor with a maximum horizontal refresh rate of 130 kHz

Aspect	Display	Main display		Secondary display	
Ratio	resolution	300 MHz RAMDAC	360 MHz RAMDAC	(135 MHz RAMDAC)	
	640 × 480	130	130	130	
	800 imes 600	130	130	120	
	1024 × 768	130	130	95	
	1152 × 864	130	130	85	
4:3/5:4 (standard)	1280 × 1024	130	130	80	
(1600 × 1200	130	130	_	
	1800 × 1440	120	130	_	
	1920 × 1440	115	130	_	
	2048 × 1536	110	130	_	
	856 × 480	130	130	108	
	1280 × 720	130	130	76	
16:9/16:10 (wide screen)	1600 × 1024	130	130	—	
,	1920 × 1080	115	130	_	
-	1920 × 1200	115	130	_	

Maximum horizontal refresh rate (kHz)*

* Based on a monitor with a maximum horizontal refresh rate of 130 kHz

Maximum 3D display resolutions (main display)

		Maximum display resolution			
Graphics memory	Color palette*	Double-buffering without Z-buffering	Double buffering with 16-bit Z-buffering	Double buffering with 32-bit Z-buffering	
10 MD	64 K colors (16-bit)	2048 imes 1536	1800 × 1440	1600 × 1200	
16 MB	16 M colors (32-bit)	1600×1200	1280 × 1024	1280 × 1024	
32 MB	64 K colors (16-bit)	2048 × 1536	2048 × 1536	2048 × 1536	
3Z IVID	16 M colors (32-bit)	2048 × 1536	2048 × 1536	1800 × 1440	

* 3D acceleration is only available with a 16- or 32-bit color palette.

Supported VESA modes

In the table below, VESA modes supported by your Matrox graphics card are indicated by a VESA mode number. Many Super VGA DOS programs use VESA modes.

Display resolution	16 colors	256 colors	32 K colors	64 K colors	16 M colors
640 × 400	—	100	—	—	—
640 × 480	(VGA)	101	110	111	112
800 × 600	102	103	113	114	115
1024 × 768*	_	105	116	117	118
$1280 \times 1024^*$	_	107	119	11A	11B

* To use this resolution, you may need to install Matrox System Utilities from your Matrox installation CD-ROM. For more information, see the *Readme* file included with this software.

Supported TV output modes*

- Windows 95/98/2000 or NT 4.0 (all color modes) 640 × 400 (DirectX only), 640 × 480, 800 × 600, 1024 × 768
- DOS⁺ 720 × 400, text (02h, 03h); 320 × 200, 256 colors (13h); 640 × 480, 16 colors (12h); 640 × 400, 256 colors (100h); 640 × 480, 256 colors (101h); 640 × 480, 32 K colors (110h); 640 × 480, 64 K colors (111h); 640 × 480, 16 M colors (112h)
- * Only for Matrox graphics cards with TV output support. For more information, see "Hardware information", page 43.
- † To enable TV output support for DOS display modes, use Matrox System Utilities. You can install this software from your Matrox installation CD-ROM. For more information, see the *Readme* file included with this software.

Hardware information

Features

	Millennium G400 (single-display)	Millennium G400 (DualHead)	Millennium G400 MAX (DualHead)
Graphics chip		Matrox G400 (256-bit DualBus)	
3D features	VCQ ² (Vibrant Color Quality ²), environment-mapped bump mapping, stencil buffering, anisotropic filtering, bilinear filtering, trilinear filtering, alpha blending, anti-aliased vectors, vertex fogging, table fogging, specular highlighting, 16-bit Z-buffering, 32-bit Z-buffering, single buffering, double buffering, triple buffering, texture mapping, MIP mapping, Gouraud shading		
Main RAMDAC	300 MHz	300 MHz	360 MHz
Secondary RAMDAC	_	135 MHz	135 MHz
Memory	16 MB or 32 MB	16 MB or 32 MB	32 MB
Memory type	SGRAM or SDRAM	SGRAM	SGRAM
DualHead	_	\checkmark	\checkmark
TV output*	_	\checkmark	\checkmark
Card type	Compatible with AGP 2 $ imes$ and AGP 4 $ imes$ systems [†]		
AGP form factor	ATX		

* TV output: Composite video and S-video output (NTSC and PAL)

 \dagger These cards are compatible with AGP 2imes and AGP 4imes systems and can achieve a peak AGP transfer rate of 532 MB/sec.

Matrox hardware add-ons (sold separately)

	Millennium G400 (single-display)	Millennium G400 (DualHead)	Millennium G400 MAX (DualHead)
Rainbow Runner G-Series (video editing card)	_	\checkmark	\checkmark
DualHead + TV output* (for G400 cards)	√ †	_	_
Digital flat panel (for G400 cards)	à	\checkmark	\checkmark

* TV output: Composite video and S-video output (NTSC and PAL)

† Matrox DualHead/TV output and digital flat panel add-ons can't be used at the same time.

Video specifications

- Separate sync monitors only
- The video follows the PS/2 standard, with no sync on RGB, and no blanking pedestal. Black or blank 0.0 V; White 0.700 V.
- There are five connections to a monitor that uses BNC (Bayonet Nut Connect) connectors R, G, B, HSYNC (white or gray wire), and VSYNC (black wire).

Environmental specifications

- Minimum/maximum ambient operating temperatures: 0 to 55° C
- Minimum/maximum storage temperature: -40 to 75° C
- Maximum altitude for operation: 3,000 meters
- Maximum altitude for transport: 12,000 meters
- Operating humidity: 20 to 80% relative humidity (non-condensing)
- Storage humidity: 5 to 95% relative humidity (non-condensing)

Customer support

Matrox Web and FTP sites

Matrox is on the Internet with a World Wide Web (WWW) and File Transfer Protocol (FTP) site. Our Web site has product literature, press releases, technical material, a sales office list, trade show information, and other relevant material. Our FTP site contains current drivers for Matrox products. You can download drivers using the Internet FTP site, in addition to our BBS. You can access our FTP server independently, or from the Matrox Web site.

Our address for Matrox Graphics Inc. is:

WWW;	www.matrox.com/mga	
FTP;	<u>ftp.matrox.com/pub/mga/</u>	

Send questions or comments regarding the site to:

e-mail; webmaster@matrox.com

If you have a problem

If you have a problem, we recommend that you follow the procedure below for the quickest results.

- 1 Contact your dealer This is usually the quickest and most effective method of technical assistance. Your dealer is local and may be familiar with your complete system. In the case of hardware warranty assistance, the product must be returned to the dealer, who will return it to Matrox.
- **2** If your Matrox product was provided by your computer manufacturer, contact this manufacturer. For contact information, see your computer documentation or contact the vendor.
- 3 CompuServe If you have a modem and an account on CompuServe, you can get technical assistance and driver updates directly from Matrox by typing GO MATROX at the "!" prompt.
- 4 Matrox BBS You can download driver updates (which may eliminate a particular bug), utilities, and other information from our 24-hour Bulletin Board Service (BBS). The phone number is 514-685-6008. The communication parameters are 8 data bits, 1 stop bit, and no parity. You'll be prompted to enter your first and last name and a password. If you don't have an account, it's created when you enter your name for the first time. See also "Matrox Web and FTP sites".

- 5 MATFAX instant fax Call our dial-up Matrox fax service at 514-685-0174. Using a touch-tone phone, you can have faxes sent to you automatically 24 hours a day. Available documents include common installation problems, available drivers and updates, and product data sheets.
- 6 Direct Matrox Technical Assistance If you still can't resolve a problem (and your Matrox product wasn't provided by your computer manufacturer), you can get direct technical assistance four ways:
 - Call Technical Support (Canada) at **514-685-0270**. For residents of Quebec only, call **514-822-6330**.
 - Send a FAX to 514-822-6363, Attention: Graphics Technical Assistance.
 - Send e-mail to graphics.techsupport@matrox.com.
 - Write a letter to Graphics Customer Support at our Corporate Headquarters. The address is: Matrox Graphics Inc., 1055 St. Regis Blvd., Dorval, QC, Canada, H9P 2T4.

Information we need

Please give a complete description of the problem, and include:

- Matrox card serial number, model number, revision number, BIOS number, driver type and version, and memory address at which the Matrox card is installed.
- Computer brand name, system BIOS manufacturer and version number or date, bus type, model, processor speed, and amount of memory.
- Monitor brand and model name.
- Operating system and version if you're using a memory manager, its brand and version. Also, list any memory-resident programs in use.
- If you're using a network card, its brand and version.
- Brand and model of any other cards and devices installed on your system.

Program specific problems

If a problem appears with a specific program, please give us the following information:

- Display settings (color palette, display resolution, and so on) applied when the problem occurs.
- Program name and version. Name any add-on packages you're using.
- If possible, take note of the file and segment address that caused the problem.
- Detailed steps known to cause the bug, so we can reproduce it.

0	Where to get information For display information:
9x 2k	 Windows 95/98/2000 – access the Information property sheet (see "Accessing PowerDesk property sheets", page 6).
Ŵт	■ Windows NT 4.0 – click $\exists R \text{ Start} \rightarrow \text{Programs} \rightarrow \text{Matrox PowerDesk NT} \rightarrow \text{Matrox Display Properties} \rightarrow \text{Information.}$
	For system information:
M9x 2k	 Windows 95/98/2000 – right-click the My Computer icon on your Windows desktop background, then click Properties.
198 2k	■ Windows 98/2000 – click Start → Programs → Accessories → System Tools → System Information.
Ŵт	■ Windows NT 4.0 – click B Start → Administrative Tools (Common) → Windows NT Diagnostics.

Warranty

A. Limited Warranty Statement

- Matrox Graphics Inc. ("Matrox") warrants to the end-user customer, who provides adequate proof of purchase that Matrox hardware products purchased from Matrox authorized dealers will be free from defects in materials and workmanship for a period of three (3) years from the date of purchase. This warranty applies only to the original enduser purchaser and is non-transferable. Conditions and limitations of Matrox's warranty are stated below.
- 2. Matrox's limited warranty covers only those defects which arise as a result of normal use of the hardware and does not apply to any:
 - a. improper or inadequate maintenance;
 - b. incompatibilities due to the user's hardware or software applications with or in which the Matrox product interfaces;
 - c. product of a special or custom-made nature;
 - d. unauthorized modification or misuse;
 - e. improper installation, misapplication or negligence;
 - f. operation outside the product's environmental specifications;
 - g. improper site preparation or maintenance;
 - h. software;
 - i. other causes that do not relate to a product defect;
 - j. defects or damage suffered as a result of force majeure (including theft);
 - k. defects or damage suffered as a result of normal wear and tear; and/or
 - I. stolen goods.
- 3. If Matrox receives, during the applicable warranty period, notice of a defect in a warranted hardware product and the defective Matrox product in question, Matrox shall at its sole option, either repair or replace the product, and shall return the repaired product or a replacement product within a reasonable delay. The replacement product may not be new, provided that it has functionality at least equal to that of the product being replaced.
- 4. This warranty is valid in any country where Matrox hardware products are distributed by Matrox or its authorized dealers.
- 5. This Limited Warranty Statement gives the customer specific legal rights. The customer may also have other rights which vary from state to state in the United States, from province to province in Canada, and from country to country elsewhere in the world.

B. Limitations of Warranty

- NEITHER MATROX NOR ANY OF ITS THIRD PARTY SUPPLIERS MAKES ANY OTHER WARRANTY OF ANY KIND, WHETHER EXPRESSED OR IMPLIED, WITH RESPECT TO MATROX PRODUCTS. MATROX SPECIFICALLY DISCLAIMS (and the customer, by accepting the Matrox product, specifically accepts such disclaimer and waives) ALL OTHER WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR OR INTENDED PURPOSE OR USE AND THE WARRANTY AGAINST LATENT DEFECTS, WITH RESPECT TO THE HARDWARE AND/OR SOFTWARE.
- 2. To the extent that this Limited Warranty Statement is inconsistent with the law of the locality where the customer purchases the Matrox product, this Limited Warranty Statement shall be deemed modified to be consistent with such local law. Under such local law, certain limitations of this Limited Warranty Statement may not apply to the consumer.
- 3. To the extent allowed by local law, the remedies provided in this Limited Warranty Statement are the customer's sole and exclusive remedies.

C. Limitations of Liability

- 1. EXCEPT FOR THE OBLIGATIONS SPECIFICALLY SET FORTH IN THE LIMITED WARRANTY STATEMENT, IN NO EVENT SHALL MATROX BE LIABLE FOR:
 - a. any direct, indirect, special, incidental, consequential, foreseeable or unforeseeable, or punitive damages, whether based on contract, tort, delict or any other legal theory and whether advised of the possibility of such damages; and/or
 - b. damages arising from the loss of use, data, production revenue and/or profit of in connection with the Matrox product or any business interruption.
- 2. Without prejudice to the foregoing, any liability of Matrox for any breach of warranty shall be limited to the amount paid by the customer for the defective hardware in question.
- 3. To the extent allowed by local law, Matrox's entire liability and the customer's exclusive remedy shall be the repair or replacement of any defective product during the warranty period. Matrox does not offer any other warranty with respect to Matrox hardware or software or any other hardware or software.
- Customer shall be responsible for all applicable taxes, duties and customs fees on any replacement unit, as well as all transport, insurance, storage and other charges incurred on all returned products.

D. Obtaining Service

- 1. Verify that your Matrox product was installed and configured according to the information in its accompanying documentation.
- 2. Read the "Troubleshooting" information included with the Matrox product to see if you can solve the problem yourself.
- 3. If you are still experiencing difficulties, please contact your dealer where you purchased your Matrox product.
- 4. If you must return a Matrox product, leave the configuration as it was when you were using it, and leave all identification stickers on the product. Pack the product in its original box and return to your Matrox dealer where the product was purchased, together with your proof of purchase. Your Matrox dealer will return the product for you. Alternatively, if this first option is unavailable to you, you may contact the Matrox Technical Support group who will issue an Return Merchandise Authorization (RMA) number, upon receipt of adequate proof of purchase, and inform you of shipping instructions. DO NOT RETURN THE PRODUCT TO MATROX WITHOUT MATROX'S RMA NUMBER AND EXPRESS AUTHORIZATION.

E. General

This limited warranty shall be governed by the laws of the Province of Quebec, Canada and the federal laws of Canada applicable therein and the courts of the Province of Quebec shall have exclusive jurisdiction to hear and decide any dispute instituted by the customer in connection with this limited warranty; the customer waives, by accepting the product, its rights to institute proceedings in connection with this warranty against Matrox in any jurisdiction other than Quebec.

Index

A

address, Matrox 46 Adobe Acrobat 17 AGP 2

B

BBS, Matrox 45 BIOS 16, 27 BNC monitor connection 13 bus mastering 25

С

CD-ROM, Matrox 4, 12, 17, 27, 34 composite video 19, 20 CompuServe 45 customer support 45–47, 48–49

D

DDC 7 DirectX 27 display information 39–42 DualHead 8, 39

Е

e-mail, Matrox 46 expansion slots 2, 11

F

FAX, Matrox 46 FTP, Matrox 45

H

hardware acceleration 29 information 43–44 installation 2–4

L

installation hardware 2-4 software 5 IRQ 25, 26

Μ

monitor connector 12 settings 12–15, 24 setup 6–7 multi-display mode 6, 7, 8, 9 setup 8–9

0

online documentation 7, 14

Ρ

PDF 17 Plug-and-Play 6, 7 PowerDesk 6, 10, 24 property sheets 6

S

SCART 20 software installation 5 Matrox 23 setup 6–10 sound output 20 S-video 19, 20

Т

technical assistance 46 troubleshooting 11–17 DVD 32–33 graphics 23–30 sound 37–38 TV output 33–36 video 30–32 TV output connection setup 18–20 display modes 34 software setup 21–22 troubleshooting 33–36

U

unified display driver 28

V

VESA 7, 39, 42 VGA 2, 39, 42

W

warning 2, 3, 6, 13, 18, 21, 31, 32 warranty 48–49 Web, Matrox 45

Software license agreement

Single User Products This Matrox software (the "Software") is copyrighted by Matrox Graphics Inc. All rights are reserved. The purchaser is granted a license to use the software only, subject to the following restrictions and limitations.

- 1. The license is for the original purchaser only, and is not transferable without written permission of Matrox.
- 2. The original purchaser may use the Software on a single computer owned or leased by the original purchaser. You may not use the Software on more than a single machine, even if you own or lease more than one machine, without written consent of Matrox.
- 3. The original purchaser may make back-up copies of the Software for his or her own use only, subject to the use limitations of this license.
- 4. The original purchaser may not engage in, nor permit third parties to engage in, any of the following:
 - · Providing or disclosing the Software to third parties.
 - Providing use of the Software in a computer service business, network, time-sharing, multiple CPU or multi-user arrangement to users who are not individually licensed by Matrox.
 - Making alterations or copies of any kind in the Software (except as specifically permitted above).
 - · Attempting to unassemble, de-compile or reverse engineer the Software in any way.
 - · Granting sublicenses, leases, or other rights in the Software to others.
 - · Making copies, or verbal or media translations, of the user's guide.
 - Making telecommunication data transmissions of the Software.

Matrox reserves the right to terminate this license if there is a violation of its term or default by the Original Purchaser. Upon termination, for any reason, all copies of the Software must be immediately returned to Matrox, and the Original Purchaser shall be liable to Matrox for any and all damages suffered as a result of the violation or default.

Limited warranty Matrox warrants to you, for a period of ninety (90) days normal use from your date of purchase, that:

- 1. The CD/disks on which the software is furnished and the documentation are not defective.
- 2. The Software is properly recorded upon the CD/disks included.
- 3. The documentation is substantially complete and contains all the information Matrox deems necessary to use the software.
- 4. The Software functions substantially as described in the documentation.

Matrox's entire liability and your exclusive remedy shall be the replacement of any CD/Disks or documentation not meeting these warranties, which is returned to Matrox or an authorized dealer, together with a copy of your paid receipt. The above is the only warranty of any kind, either express or implied, including, but not limited to the implied warranties of merchantability and fitness for a particular use that is made by Matrox on this Licensed Software. In no event shall Matrox be liable to you or to any third party for consequential, special, indirect or incidental damages which you may incur as a result of using the licensed software, including, but not limited to, loss of data, or information of any kind which you may experience.

Thank you for choosing Matrox

Please register online (<u>www.matrox.com/register</u>) to be eligible for customer support, new product announcements, and information on special offers and upcoming events.



FCC Compliance Statement

Remark for G4+M series This device has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment causes harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: • Reorient or relocate the receiving antenna • Increase the separation between the equipment and receiver • Connect the equipment into an outlet on a circuit different from that to which the receiver is connected • Consult the dealer or an experienced radio/TV technician for help.

WARNING Changes or modifications to this unit not expressly approved by the party responsible for the compliance could void the user's authority to operate this equipment. The use of shielded cables for connection of the monitor to the card is required to meet FCC requirements.

Declaration of conformity of a Class B digital device according to the FCC rules

We, the Responsible Party Matrox, 1075 Broken Sound Parkway, Boca Raton, FL 33487 • Telephone: (561) 989-9626 • Attention: Conformity Group Matrox

Declare that the Product: G4+M series Complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any question regarding this declaration should be forwarded to the above coordinates.

CANADA

(English) Industry Canada Compliance Statement

Remark for G4+M series This digital apparatus does not exceed the Class B limits for radio noise emission from digital apparatus set out in the Radio Interference Regulation of Industry Canada.

(Français) Conformité avec les exigences du ministère de l'Industrie Canada

Avis relatif à la série G4+M Le présent appareil numérique n'émet aucun bruit radioélectrique dépassant les limites applicables aux appareils numériques de Classe B prescrites dans le Règlement sur le brouillage radioélectrique édicté par Industrie Canada.

JAPAN

VCCI Compliance Statement

Remark for G4+M series This is a Class B product based on the standard of the Voluntary Control Council for Interference from Information Technology Equipment (VCCI). If this is used near a radio or television receiver in a domestic environment, it may cause radio interference. Install and use the equipment according to instructions in the manual.

この装置は、情報処理装置等電波障害自主規制協議会(VCCI)の基準 に基づくクラスB情報技術装置です。この装置は、家庭環境で使用すること を目的としていますが、この装置がラジオやテレビジョン受信機に近接して 使用されると、受信障害を引き起こすことがあります。 取扱説明書に従って正しい取り扱いをして下さい。

(English) European user's information – Declaration of Conformity

CE Remark for G4+M series This device complies with EC Directive 89/336/EEC for a Class B digital device. It has been tested and found to comply with EN50081-1 and EN50082-1. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures. To meet EC requirements, shielded cables must be used to connect the monitor and other peripherals to the card.

(Français) Informations aux utilisateurs Européens – Déclaration de conformité

Avis relatif à la série G4+M Cette unité est conforme à la directive communautaire 89/336/EEC pour les unités informatiques de classe B. Les tests effectués ont prouvé qu'elle est conforme aux directives EN50081-1 et EN50082-1. Le fonctionnement de ce matériel dans un environnement résidentiel provoque parfois des interférences radioélectriques; il incombe dans ce cas à l'utilisateur d'y remédier. Pour respecter les impératifs communautaires, les câbles de connexion entre le moniteur ou autres périphériques et la carte doivent être blindés.

(Deutsch) Information für europäische Anwender – Konformitätserklärung

Anmerkung für die G4+M Dieses Gerät entspricht den EG-Bestimmungen 89/336/EEC für Klasse-B-Digitalgeräte. Das Gerät wurde erfolgreich auf Einhaltung folgender Richtlinien getestet: EN50081-1 und EN50082-1. Der Betrieb dieses Geräts in Wohngebieten kann zu störenden Interferenzen führen, die der Benutzer dann auf eigene Kosten beheben muß. Um EG-Anforderungen zu entsprechen, müssen zum Anschließen des Monitors und anderer Peripheriegeräte an die Karte abgeschirmte Kabel verwendet werden.

(Italiano) Informazioni per gli utenti europei – Dichiarazione di conformità

Commento sulle serie G4+M Questa apparecchiatura è conforme alla direttiva CEE 89/336/EEC per i dispositivi digitali di Classe B. È stata verificata ed è risultata conforme con le norme EN50081-1 e EN50082-1. In un ambiente domestico questo prodotto può causare interferenze radio ed in tal caso può essere necessario che l'utente prenda gli opportuni provvedimenti. Per soddisfare i requisiti CEE, il monitor e le altre periferiche vanno collegati alla scheda grafica con cavi schermati.

(Español) Información para usuarios europeos – Declaración de conformidad

Observación para la serie G4+M Este dispositivo cumple la Directiva CE 89/336/CEE para un dispositivo digital de Clase B. Se ha verificado y se ha observado que cumple las normas EN50081-1 y EN50082-1. En ambientes domésticos, este producto puede causar interferencias de radiofrecuencia, en cuyo caso el usuario será responsable de tomar las medidas adecuadas. Para satisfacer las disposiciones de la CE, deberán utilizarse cables apantallados para conectar el monitor y demás periféricos a la tarjeta.

(Français) Avertissement sur l'épilepsie

À lire avant toute utilisation d'un jeu vidéo par vous-même ou votre enfant Certaines personnes sont susceptibles de faire des crises d'épilepsie ou d'avoir des pertes de conscience à la vue de certains types de lumières clignotantes ou d'éléments fréquents dans notre environnement quotidien. Ces personnes s'exposent à des crises lorsqu'elles regardent certaines images télévisées ou qu'elles jouent à certains jeux vidéo. Ces phénomènes peuvent apparaître alors même que le sujet n'a pas d'antécédent médical ou n'a jamais été confronté à une crise d'épilepsie.

Si vous-même ou un membre de votre famille avez déjà présenté des symptômes liés à l'épilepsie (crise ou perte de conscience) en présence de stimulations lumineuses, veuillez consulter votre médecin avant toute utilisation.

Nous conseillons aux parents d'être attentifs à leurs enfants lorsqu'ils jouent avec des jeux vidéo. Si vous-même ou votre enfant présentez un des symptômes suivants: vertige, trouble de la vision, contraction des yeux ou des muscles, perte de conscience, trouble de l'orientation, mouvement involontaire ou convulsion, veuillez immédiatement cesser de jouer et consultez un médecin.

Précautions à prendre dans tous les cas pour l'utilisation d'un jeu vidéo • Ne vous tenez pas trop près de l'écran. • Jouez à bonne distance de l'écran de télévision et aussi loin que le permet le cordon de raccordement. • Utilisez de préférence les jeux de vidéo sur un écran de petite taille. • Évitez de jouer si vous êtes fatiqué ou si vous manquez de sommeil. • Assurez-vous que vous jouez dans une pièce bien éclairée. • En cours d'utilisation, faites des pauses de dix à quinze minutes toutes les heures.

Copyright © 2000 Matrox Graphics Inc. • (English) All rights reserved. • (Français) Tous droits réservés. • (Deutsch) Alle Rechte vorbehalten. • (Italiano) Tutti i diritti riservati. • (Español) Reservados todos los derechos.

Trademarks • Marques déposées • Warenzeichen • Marchi registrati • Marcas registradas

Matrox Electronic Systems Ltd.	Matrox [®] , Matrox Mystique [®]
Matrox Graphics Inc.	CenterWINDOW [™] , DeskNav [™] , Desktop Navigator [™] , DualHead [™] , DVDMax [™] , DynaView [™] , Matrox G400 [™] , Matrox HD Benchmark [™] , Matrox Impression [™] , Matrox m3D [™] , Matrox Marvel [™] , Matrox Media XL [™] , Matrox Millennium [™] , Matrox MMS [™] , Matrox Multi-Monitor Series [™] , Matrox PowerDesk [™] , Matrox Multi-Monitor Series [™] , Matrox PowerDesk [™] , Matrox Quick Connect [™] , MaxVIEW [™] , MGA [™] , MGA-G100 [™] , MGA-G200 [™] , Productiva [™] , QuickDesk [™] , Rainbow Runner [™] , MGA PowerDesk [™] , ModeSWITCH [™] , PanEND [™] , PanHOME [™] , PanLOCK [™] , Pc-VCR Remote [™] , PixeITOUCH [™] , PowerDoc [™] , QCDP [™] , QuickAccess [™] , ResSwitch [™]
Adobe Systems Inc.	Acrobat [®] , Adobe [®]
Apple Computer, Inc	Apple [®] , QuickTime [®]
Avid Technology, Inc.	Avid®, Avid Cinema™, Cecil B. DeMovie™
CompuServe Inc	CompuServe®
Dolby Laboratories, Inc	Dolby [®] , Dolby Digital [®]
Eastman Kodak Company	Kodak Precision™
Intel Corporation	Intel [®] , Indeo [®] , MMX [™] , Pentium [®]
International Business Machines Corporation	IBM®, OS/2®, PowerPC®, VGA®
Microsoft Corporation	ActiveMovie [™] , ActiveX [™] , Direct3D [®] , DirectDraw [®] , DirectShow [™] , DirectVideo [™] , DirectX [™] , Microsoft [®] , MS-DOS [®] , Windows [®] , Windows 95 [™] , Windows 98 [™] , Windows for Workgroups [™] , Windows NT [™] , Windows 2000 [™]
Radius Inc.	Cinepak®
Silicon Graphics, Inc	OpenGL®
Silicon Image, Inc.	PanelLink™
Sonnetech Ltd.	Colorific [®]
Ulead Systems, Inc	Ulead®, MediaStudio™, Photo Express™
U.S. Environmental Protection Agency	Energy Star™
VDOnet Corporation Limited	VDOnet®, VDOPhone™

(English) All other nationally and internationally recognized trademarks and tradenames are hereby acknowledged.
(Français) Toutes les autres marques et tous les autres noms déposés reconnus nationalement ou internationalement sont également reconnus par les présentes.
(Deutsch) Alle sonstigen national und international bekannten Warenzeichen und Produktnamen werden hiermit anerkannt.
(Italiano) Eventuali altri nomi di prodotti menzionati in questo manuale sono dei proprietà di rispettivi produttori.
(Español) Por medio del presente se reconocen todas las demás marcas y nombres comerciales reconocidos a nivel nacional e internacional.

(English) Disclaimer

THE INFORMATION IN THIS GUIDE IS SUBJECT TO CHANGE AT ANY TIME AND WITHOUT NOTICE.

Matrox Graphics Inc. reserves the right to make changes in specifications at any time and without notice. The information provided by this document is believed to be accurate and reliable. However, no responsibility is assumed by Matrox Graphics Inc. for its use; nor for any infringements of patents or other rights of third parties resulting from its use. No license is granted under any patents or patent rights of Matrox Graphics Inc.

(Français) Responsabilité

LES INFORMATIONS CONTENUES DANS CE MANUEL PEUVENT ÊTRE MODIFIÉES À TOUT MOMENT SANS PRÉAVIS.

Matrox Graphics Inc. se réserve le droit de modifier les spécifications à tout moment sans préavis. Les informations contenues dans ce manuel sont reconnues comme étant précises et fiables. Cependant, Matrox Graphics Inc. n'assume aucune responsabilité concernant leur utilisation, ni leur contrefaçon ou les autres droits des tiers résultant de leur utilisation. Aucune licence n'est accordée sur aucun brevet ou droit d'exploiter un brevet de Matrox Graphics Inc.

(Deutsch) Haftungsablehnungserklärung

DIE IN DIESEM HANDBUCH ENTHALTENEN ANGABEN UND DATEN KÖNNEN OHNE VORHERIGE ANKÜNDIGUNG GEÄNDERT WERDEN.

Die Matrox Graphics Inc. behält sich das Recht vor, jederzeit und ohne Ankündigung technische Daten zu ändern. Es wird keine Garantie für die Richtigkeit des Inhalts dieses Handbuchs übernommen. Weiterhin übernimmt die Matrox Graphics Inc. keinerlei Verantwortung für die Benutzung dieses Handbuchs, weder für Verstöße gegen Patentrechte noch für andere Rechte Dritter, die aus seinem Gebrauch resultieren mögen. Es werden keinerlei Lizenzrechte gewährt für sämtliche Patente oder Patentrechte der Matrox Graphics Inc.

(Italiano) Discrezionalità

LE INFORMAZIONI CONTENUTE NEL PRESENTE DOCUMENTO SONO SOGGETTE A MODIFICHE SENZA PREAVVISO.

Matrox Graphics Inc. si riserva il diritto di apportare variazioni di qualunque tipo alle specifiche tecniche in qualunque momento e senza alcun preavviso. Le informazioni contenute in questa documentazione sono ritenute corrette e attendibili. In ogni caso, non è imputabile a Matrox Graphics Inc. nessuna responsabilità per il loro utilizzo, come nessuna violazione a brevetti o diritti di altri produttori derivante dal loro utilizzo.

(Español) Renuncia

LA INFORMACION QUE CONTIENE EL PRESENTE MANUAL ESTA SUJETA A CAMBIOS SIN PREVIO AVISO EN CUALQUIER MOMENTO.

Matrox Graphics Inc. se reserva el derecho de realizar modificaciones en cualquier momento y sin previo aviso. La información facilitada en este documento se considera que es exacta y fiable. Sin embargo, Matrox Graphics Inc. no asume ninguna responsabilidad por su uso; ni por cualquier infracción de patentes u otros derechos de terceras partes derivados de su uso. No se concede ninguna licencia bajo cualesquiera patentes o derechos de patentes de Matrox Graphics Inc.

Matrox Graphics Inc.

1055 St-Regis Blvd. Dorval, Quebec Canada H9P 2T4

Tel: (514) 822-6320

Fax: (514) 822-6363

Fax-back service: (514) 685-0174

BBS: (514) 685-6008

Technical support: (514) 685-0270 In Quebec, call: (514) 822-6330 E-mail: *graphics.techsupport@matrox.com*

Web site: www.matrox.com/mga

France

Matrox France SARL 2, rue de la Couture, Silic 225 94528 Rungis Cedex, France

Tél: 01 45.60.62.00

Fax: 01 45.60.62.05

Support technique: 01.45.60.62.75 www.matrox.com/mga/francais/tech_support/tech_request_form.htm

Site Web: www.matrox.com/mga/francais

Italia

Agenzia Italiana di Matrox Graphics Inc. 3G electronics via Boncompagni 3B 20139 Milano, Italia

Fax: 02-5253045

BBS: 02-5253044

Informazioni commerciali: 02-5253095 Posta elettronica: *commerciale.3g@treg.it*

Assistenza tecnica: 02-5253099 Posta elettronica: <u>supporto.3g@treg.it</u>

Sito Web: www.matrox.com/mga/italia

Deutschland

Matrox Electronic Systems GmbH Inselkammerstaße 8 D-82008 Unterhaching bei München, Deutschland Tel: 089 614 474-0

Fax: 089 614 9743

BBS: 089 614 00 91

BBS (ISDN): 089 614 474-91

Vertriebs Infoline: 089 614 474-44 E-mail: Produktinfo_Matrox@compuserve.com

Technische Unterstützung: 089 614 474-33 E-mail: <u>TechSupport_Matrox@compuserve.com</u>

Web-Site: www.matrox.com/mga/deutsch

United Kingdom

Matrox UK Sefton Park Stoke Poges Buckinghamshire England SL2 4JS

Sales: + 44 (0) 1753 66 55 44 E-mail: *graphic.info.uk@matrox.com* Fax: + 44 (0) 1753 66 55 99

Technical support: + 44 (0) 1753 66 55 22 E-mail: graphic.tech.uk@matrox.com

Hong Kong

Matrox Asia Ltd. 12/F, Guangdong Investment Tower 148 Connaught Road Central Sheung Wan Hong Kong Tel: (852) 2281-5700 Fax: (852) 2537-9530

E-mail: tech-support@matroxintl.com

matrox